

EPDM

COMMERCIAL GRADE

General Purpose


Non-Oil Resistance

Generally Resistant To

Sunlight and Ozone, Animal and Vegetable Oils, and Strong Oxidizing Chemicals

Generally Attacked By

Mineral Oils and Solvents, Aromatic Hydrocarbons

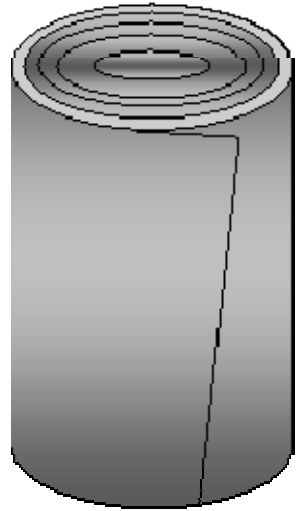

Color	Finish	Duro	Tensile	Elongation	Temperature
Black	Smooth	70	1000 PSI	300%	250°F 121°C

Service is Our Business

All technical advise and recommendation are rendered by Seller free of charge. While based on data believed to be reliable, seller assumes no responsibility.